


Clean Room Luminaire is designed to enclose a gasket suitable for cleanroom applications. Top access with a hinge door and handle for easy opening of the luminaire. The sliding bracket holds the door in position when opened for safety purposes.



Recommended with PHILIPS Master TLED (LED Tube)

PCR			
No of Lamp	2	3	4
Lamp holder	G13 Push-through lamp holders		
Type of Lamp	T8 LED Tube 600mm / 1200mm		
Diffuser	Polycarbonate		
Wire	HR 105°C		
Housing	0.5mm cold roll steel construction Coated with high gloss white epoxy powder paint		
Mounting	Recessed (Top Access)		
IP rating	IP54		
Warranty	3-years		


Application



Cleanroom

CODE	LAMP WATTAGE (W)	LAMP LUMEN (lm)	CCT (K)	INSTALLATION	NO OF LAMP	DIMENSION mm
PCR-0612-2/21 4000K	14	2100	4000K	Recessed	2	1197 x 595 x 100
PCR-0612-2/21 6500K	14	2100	6500K	Recessed	2	1197 x 595 x 100
PCR-0612-3/21 4000K	14	2100	4000K	Recessed	3	1197 x 595 x 100
PCR-0613-2/21 6500K	14	2100	6500K	Recessed	3	1197 x 595 x 100
PCR-0612-4/21 4000K	14	2100	4000K	Recessed	4	1197 x 595 x 100
PCR-0613-4/21 6500K	14	2100	6500K	Recessed	4	1197 x 595 x 100
PCR-0612-2/25 4000K	14.7	2500	4000	Recessed	2	1197 x 595 x 100
PCR-0612-2/25 6500K	14.7	2500	6500	Recessed	2	1197 x 595 x 100
PCR-0612-3/25 4000K	14.7	2500	4000	Recessed	3	1197 x 595 x 100
PCR-0613-2/25 6500K	14.7	2500	6500	Recessed	3	1197 x 595 x 100
PCR-0612-4/25 4000K	14.7	2500	4000	Recessed	4	1197 x 595 x 100
PCR-0613-4/25 6500K	14.7	2500	6500	Recessed	4	1197 x 595 x 100

Dimension

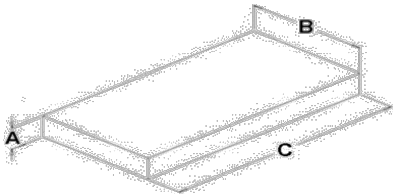

Dimension subject to +/- 1.5mm