


The LED Highbay range of luminaires provides the optimal balance between enhanced performance and value for money. The family covers a wide product range with a variety of options, competitive specifications, and long-term quality and reliability. Excellent in energy saving.



Application

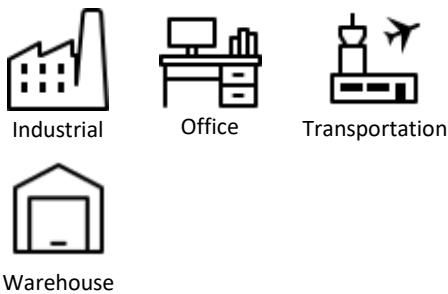

PHB			
System Power	100W	150W	200W
System lumen	17000lm	24990lm	31390lm
System Efficacy	160lm/W		
Input Voltage	220-240V 50/60Hz		
CRI	80		
CCT	4000K/5700K		
SDCM	5		
Power Factor	0.9		
Beam Angle	90° (WB) 60° (optional)		
IP rating	IP65 / IK08		
Lifetime	50,000 @L70		
Warranty	5-years		

CODE	WATTAGE (W)	LUMEN (lm)	CCT (K)	BEAM ANGLE	DIMENSION mm
PLHB LED160/57 L-WB PSU IP65	100	17000	5700	WB	240 x 157.3 x 110.8
PLHB LED160/57 L-MB PSU IP65	100	17000	5700	MB	240 x 157.3 x 110.8
PLHB LED240/57 L-WB PSU IP65	150	24990	5700	WB	280 x157.3 x 110.8
PLHB LED240/57 L-MB PSU IP65	150	24990	5700	MB	280 x157.3 x 110.8
PLHB LED320/57 L-WB PSU IP65	200	31390	5700	WB	320 x 167.1 x 120.6
PLHB LED320/57 L-MB PSU IP65	200	31390	5700	MB	320 x 167.1 x 120.6
PLHB LED160/40 L-WB PSU IP65	100	17000	4000	WB	240 x 157.3 x 110.8
PLHB LED160/40 L-MB PSU IP65	100	17000	4000	MB	240 x 157.3 x 110.8
PLHB LED240/40 L-WB PSU IP65	150	24990	4000	WB	280 x157.3 x 110.8
PLHB LED240/40 L-MB PSU IP65	150	24990	4000	MB	280 x157.3 x 110.8
PLHB LED320/40 L-WB PSU IP65	200	31390	4000	WB	320 x 167.1 x 120.6
PLHB LED320/40 L-MB PSU IP65	200	31390	4000	MB	320 x 167.1 x 120.6

Dimming / Sensor (available on request)

Dimension

