


Best optimized cleanroom lighting fitting suitable for cleanroom classification 10~1000. It is designed with slim, compact and to be installed on T-Bar grids. These aerodynamic ceiling lights are specially conceived for Clean Rooms and Laminar Air Flow Systems: their width (50 mm) and the special shape of the screen allow excellent airflow control without turbulence. Your excellent choice for both new and retrofit cleanroom lighting projects.



Application




Cleanroom

LUMINAX				
Nominal Power	15W	20W	35W	50W
System lumen	2025lm	2800lm	4500lm	6500lm
System efficacy	135lm/W			
CCT (K) / CRI	4000K / 6500K , >80			
Input Voltage (V)	220-240 50/60Hz			
Control	FIXED ON-OFF / DALI (OPTION)			
Lifetime (Hr)	50,000			
IP rating	IP54			
Warranty	5-years			

CODE	TUBE WATTAGE (W)	LAMP LUMEN (lm)	CCT (K)	DIMENSION (A x B x C) mm
PTD2 LED20 NW L600 PSU	2025	15	4000	650 x 50 x 100
PTD2 LED20 CW L600 PSU	2025	15	6500	650 x 50 x 100
PTD2 LED25 NW L1200 PSU	2800	20	4000	1250 x 50 x 100
PTD2 LED25 CW L1200 PSU	2800	20	6500	1250 x 50 x 100
PTD2 LED45 NW L1200 PSU	4500	35	4000	1250 x 50 x 100
PTD2 LED45 CW L1200 PSU	4500	35	6500	1250 x 50 x 100
PTD2 LED65 NW L1500 PSU	6500	50	4000	1550 x 50 x 100
PTD2 LED65 CW L1500 PSU	6500	50	6500	1550 x 50 x 100

Dimension

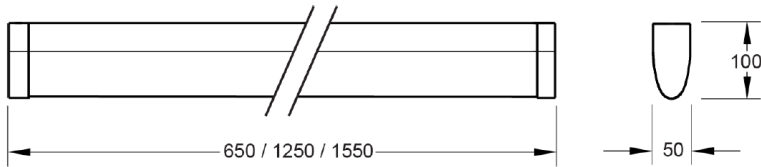

Dimension subject to +/- 1.5mm